


# JF-IPC-BM4420-IR2-V2

## 1080P Starlight Network Dome Camera

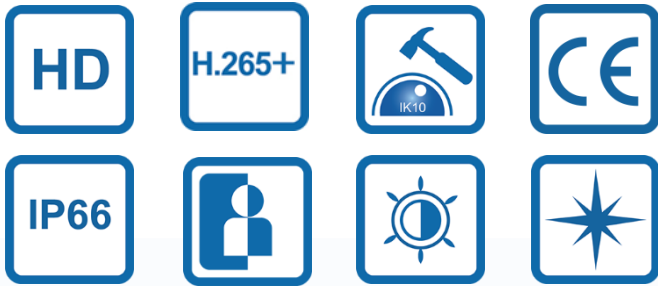

### Features

- ◆ 1080P@25fps
- ◆ -V2: Support WDR
- ◆ HD lens:3.6mm (6mm optional)
- ◆ Support ONVIF(profile S)
- ◆ Support H.265+/H.265/H.264+/H.264
- ◆ Video compression, multi-level video quality configuration
- ◆ Support intelligent video: Tripwire, Intrusion, Missing Object;
- ◆ Protection level is IP66,IK10(optional)
- ◆ Supporting WEB, VMS, MYEYE platform;
- ◆ Support mobile phone monitoring (IOS, Android);


### Specification

Camera	
Model	JF-IPC-BM4420-IR2-V2
Image Sensor	1/2.8" 1080P Exmor CMOS
Min.illumination	0.001Lux@F1.2(Color)/0.0001Lux@F1.2(B/W)
Lens	3.6mm (6mm optional)
Day/Night	IR CUT
Wide Dynamic Range	120dB
Max.IR Distance	30m
Video Compression	H.265+/H.265/H.264+/H.264
Multi-streaming	Dual-stream
Frame Rate	1080P@25fps
Intelligent Video	Tripwire, Intrusion, MissingObject
Compatibility	ONVIF
Interface	
Audio In/Out	--
Memory Slot	--
Alarm In/Out	--
General	
Ingress Protection	IP66,IK10(optional)
Working Temperature	-20℃~+65℃
Material	Metal
Power	DC12V±10%,PoE



# JF-IPC-BM4420-IR2-V2

## 1080P Starlight Network Dome Camera

### Dimensions

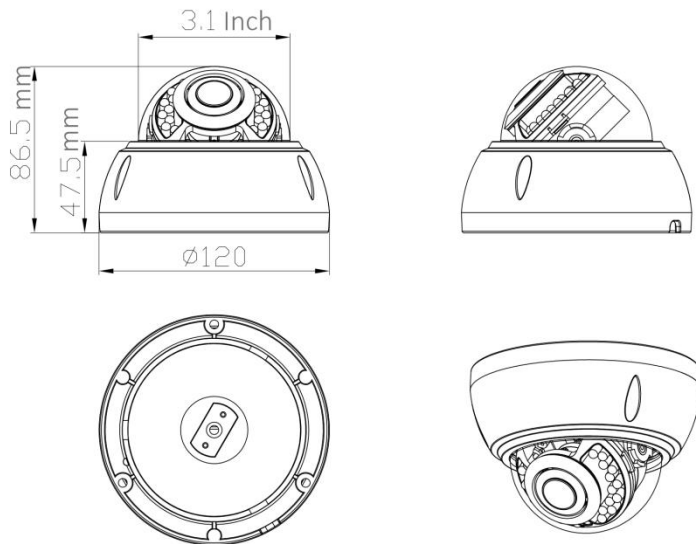

### Accessories (optional)

Bracket	Junction Box
PA-BR-W2	PA-BO-C1
	

JF TECH Co.,Ltd.  
Headquarters(Hangzhou):  
Building 9, Yinhu Innovation Center, Hangzhou, China  
Business Center(Shenzhen):  
A 7th Floor, Block Sakata 5 Avenue and Chong Hing Times Tower Shenzhen  
All Rights Reserved • Specifications subject to change without notice.

Website:<http://www.jftech.com>  
Tel:+86-0571-23271188

Tel:+86-0755-32898088